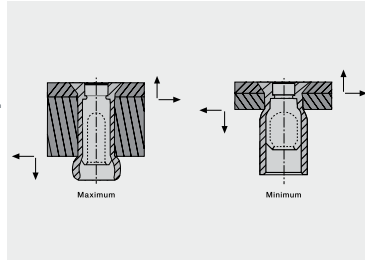
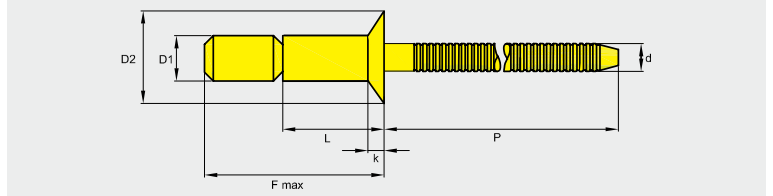


SENKKOPF (100°) MIT GERILLEM NIETDORN COUNTERSUNK HEAD (100°) WITH GROOVED MANDREL TÊTE FRAISÉE (100°) CLOU CANNELÉ



Stahl verzinkt
Steel zinc plated
Acier zingué

Stahl verzinkt
Steel zinc plated
Acier zingué



Ø 4,8 mm

D1 = 4,8 +/- 0,09 mm


D2 = 9,0 + 0 / - 1,0 mm








k = 2,2 +/- 0,25 mm

d = 3,0 mm (Ref.)

P ≥ 27,0 mm

L = +/- 0,99 mm

 4,9 - 5,1 mm

|  | F max |  | CODE |  |  |  |  |  |
|---|---------|---|-------------|---|---|---|---|---|
| 4,8 x 13,0 mm | 20,0 mm | 4,5 - 8,4 mm | 79905 04813 | 5700 N | 4400 N | 445 N | 250 | 2500 |
| 4,8 x 17,0 mm | 27,0 mm | 7,7 - 12,7 mm | 79905 04817 | | | | 250 | 2500 |

Ø 6,4 mm

D1 = 6,4 + 0 / - 0,11 mm


D2 = 10,5 + 0 / - 1,5 mm








k = 2,4 +/- 0,4 mm

d = 4,0 mm (Ref.)

P ≥ 31,0 mm

L = +/- 0,99 mm

 6,6 - 6,9 mm

|  | F max |  | CODE |  |  |  |  |  |
|---|---------|---|-------------|---|---|---|---|---|
| 6,4 x 17,0 mm | 27,0 mm | 4,5 - 12,1 mm | 79905 06417 | 10500 N | 8200 N | 1112 N | 250 | 2500 |
| 6,4 x 23,5 mm | 37,0 mm | 10,5 - 17,0 mm | 79905 06423 | | | | 250 | 2500 |

¹⁾ typische Werte typical values valeurs moyennes

Technische Änderungen vorbehalten Subject to technical modifications Sous réserve de modifications (techniques)