

RAINBOW STANDARD

BLINDNIETE



FLACHRUNDKOPF (~ DIN EN ISO 15977)

BLIND RIVETS

DOMED HEAD (~ DIN EN ISO 15977)

RIVETS AVEUGLES

TÊTE PLATE (~ DIN EN ISO 15977)

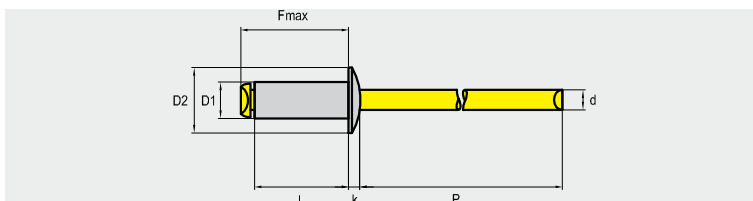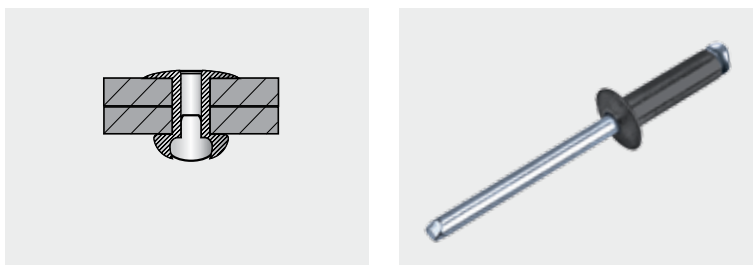

Aluminium AIMG 2,5 **RAL 9005 schwarz**

Aluminium AIMG 2,5 **RAL 9005 black**

Aluminium AIMG 2,5 **RAL 9005 noir**

Stahl verzinkt

Steel zinc plated

Acier zingué

Ø 2,4 mm

D1 = 2,4 + 0,08 / - 0,1 mm

D2 = 5,0 + 0 / - 0,7 mm

k = 0,7 + / - 0,15 mm

d = 1,45 mm

P = ≥ 27,0 mm

L = + 1,0 / - 0,2 mm

2,5 mm

| | F-Max | | CODE | | | | |
|---------------|---------|---------------|-------------|-------|-------|------|-------|
| 2,4 x 4,0 mm | 8,4 mm | 0,5 - 2,0 mm | 79005 24401 | 315 N | 355 N | 1000 | 10000 |
| 2,4 x 6,0 mm | 10,4 mm | 2,0 - 4,0 mm | 79005 24601 | | | 1000 | 10000 |
| 2,4 x 8,0 mm | 12,4 mm | 4,0 - 6,0 mm | 79005 24801 | | | 1000 | 10000 |
| 2,4 x 10,0 mm | 14,4 mm | 6,0 - 8,0 mm | 79005 24100 | | | 1000 | 10000 |
| 2,4 x 12,0 mm | 16,4 mm | 8,0 - 10,0 mm | 79005 24120 | | | 1000 | 10000 |

Ø 3,0 mm

D1 = 3,0 + 0,08 / - 0,1 mm

D2 = 6,5 + 0 / - 0,7 mm

k = 0,8 + / - 0,15 mm

d = 1,75 mm

P = ≥ 27,0 mm

L = + 1,0 / - 0,2 mm

3,1 mm

| | F-Max | | CODE | | | | |
|---------------|---------|----------------|-------------|-------|-------|------|-------|
| 3,0 x 4,0 mm | 8,4 mm | 0,5 - 1,5 mm | 79005 30400 | 620 N | 810 N | 1000 | 10000 |
| 3,0 x 5,0 mm | 9,4 mm | 1,0 - 2,5 mm | 79005 30500 | | | 1000 | 10000 |
| 3,0 x 6,0 mm | 10,4 mm | 1,5 - 3,5 mm | 79005 30600 | | | 1000 | 10000 |
| 3,0 x 7,0 mm | 11,4 mm | 3,0 - 5,0 mm | 79005 30700 | | | 1000 | 10000 |
| 3,0 x 8,0 mm | 12,4 mm | 3,5 - 5,5 mm | 79005 30800 | | | 1000 | 10000 |
| 3,0 x 10,0 mm | 14,4 mm | 5,5 - 7,0 mm | 79005 30100 | | | 1000 | 10000 |
| 3,0 x 12,0 mm | 16,4 mm | 7,0 - 9,0 mm | 79005 30120 | | | 1000 | 10000 |
| 3,0 x 14,0 mm | 18,4 mm | 9,0 - 11,0 mm | 79005 30140 | | | 1000 | 10000 |
| 3,0 x 16,0 mm | 20,4 mm | 11,0 - 13,0 mm | 79005 30160 | | | 1000 | 10000 |
| 3,0 x 18,0 mm | 22,4 mm | 13,0 - 15,0 mm | 79005 30180 | | | 1000 | 10000 |
| 3,0 x 20,0 mm | 24,4 mm | 15,0 - 17,0 mm | 79005 30200 | 500 | 5000 | | |

Ø 3,2 mm

D1 = 3,2 + 0,08 / - 0,1 mm

D2 = 6,5 + 0 / - 0,7 mm

k = 0,8 + / - 0,15 mm

d = 1,75 mm

P = ≥ 27,0 mm

L = + 1,0 / - 0,2 mm

3,3 mm

| | F-Max | | CODE | | | | |
|---------------|---------|----------------|-------------|-------|-------|------|-------|
| 3,2 x 4,0 mm | 8,9 mm | 0,5 - 1,5 mm | 79005 32400 | 760 N | 980 N | 1000 | 10000 |
| 3,2 x 5,0 mm | 9,9 mm | 1,0 - 2,5 mm | 79005 32500 | | | 1000 | 10000 |
| 3,2 x 6,0 mm | 10,9 mm | 1,5 - 3,0 mm | 79005 32600 | | | 1000 | 10000 |
| 3,2 x 8,0 mm | 12,9 mm | 3,0 - 5,0 mm | 79005 32800 | | | 1000 | 10000 |
| 3,2 x 10,0 mm | 14,9 mm | 5,0 - 7,0 mm | 79005 32101 | | | 1000 | 10000 |
| 3,2 x 12,0 mm | 16,9 mm | 7,0 - 9,0 mm | 79005 32121 | | | 1000 | 10000 |
| 3,2 x 14,0 mm | 18,9 mm | 9,0 - 11,0 mm | 79005 32141 | | | 1000 | 10000 |
| 3,2 x 16,0 mm | 20,9 mm | 11,0 - 13,0 mm | 79005 32161 | | | 1000 | 10000 |
| 3,2 x 18,0 mm | 22,9 mm | 13,0 - 15,0 mm | 79005 32180 | | | 1000 | 10000 |
| 3,2 x 20,0 mm | 24,9 mm | 15,0 - 17,0 mm | 79005 32200 | | | 500 | 5000 |
| 3,2 x 25,0 mm | 29,9 mm | 17,0 - 22,0 mm | 79005 32250 | 500 | 5000 | | |