

# DIN 7504 M

## LINSENKOPF-BOHRSCHRAUBEN


MIT KREUZSCHLITZ (H-PHILLIPS)

## PAN HEAD SELF DRILLING SCREWS

WITH CROSS RECESSED (H-PHILLIPS)

## VIS AUTOFOREUSE-TÊTE CYLINDRIQUE BOMBÉE

EMPREINTE CRUCIFORME (H-PHILLIPS)

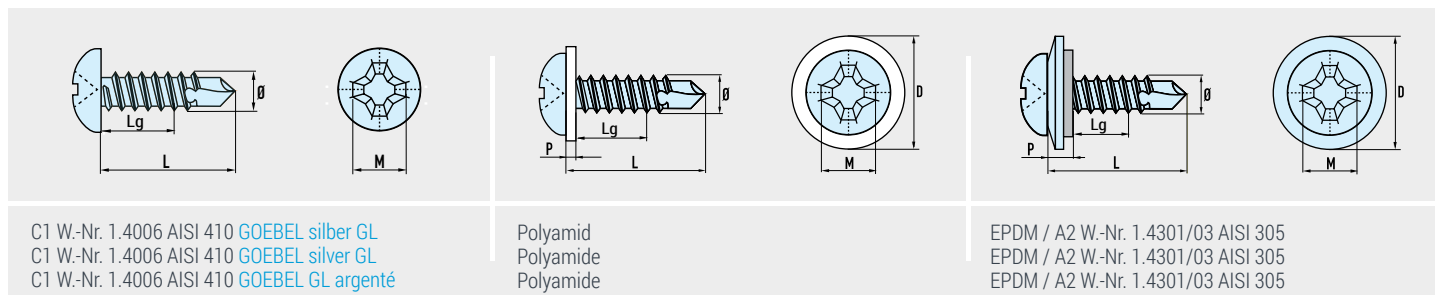

C1 W.-Nr. 1.4006 AISI 410 [GOEBEL silver GL](#)  
 C1 W.-Nr. 1.4006 AISI 410 [GOEBEL silver GL](#)  
 C1 W.-Nr. 1.4006 AISI 410 [GOEBEL GL argenté](#)

Polyamid  
 Polyamide  
 Polyamide

EPDM / A2 W.-Nr. 1.4301/03 AISI 305  
 EPDM / A2 W.-Nr. 1.4301/03 AISI 305  
 EPDM / A2 W.-Nr. 1.4301/03 AISI 305

### Ø 4,2 mm

M = No. 2



UPM/RPM/TR-MIN = max. 1200

				Polyamide				EPDM / A2			
				LG min	CODE	P	D	LG min	CODE	P	D
4,2 x 13 mm	4,3 mm 1000 <a href="#">41601 42130</a>	2,0 mm 12,0 mm	3,3 mm 1000 <a href="#">43301 42130</a>	3,0 mm 12,0 mm	2,8 mm 500 <a href="#">40631 42130</a>						
4,2 x 16 mm	7,3 mm 1000 <a href="#">41601 42160</a>	2,0 mm 12,0 mm	6,3 mm 500 <a href="#">43301 42160</a>	3,0 mm 12,0 mm	5,8 mm 500 <a href="#">40631 42160</a>						
4,2 x 19 mm	10,3 mm 1000 <a href="#">41601 42190</a>	2,0 mm 12,0 mm	9,3 mm 500 <a href="#">43301 42190</a>	3,0 mm 12,0 mm	8,8 mm 500 <a href="#">40631 42190</a>						

### Ø 4,8 mm

M = No. 2



UPM/RPM/TR-MIN = max. 1200

4,8 x 16 mm	5,8 mm 500 <a href="#">41601 48160</a>	2,0 mm 12,0 mm	4,8 mm 500 <a href="#">43301 48160</a>	3,0 mm 12,0 mm	4,3 mm 500 <a href="#">41631 48160</a>						
4,8 x 19 mm	8,7 mm 500 <a href="#">41601 48190</a>	2,0 mm 12,0 mm	7,7 mm 500 <a href="#">43301 48190</a>	3,0 mm 12,0 mm	7,2 mm 500 <a href="#">41631 48190</a>						
4,8 x 25 mm	14,7 mm 500 <a href="#">41601 48250</a>	2,0 mm 12,0 mm	13,7 mm 500 <a href="#">43301 48250</a>	3,0 mm 12,0 mm	13,2 mm 500 <a href="#">41631 48250</a>						

	A2/A4	Stahl Steel Acier
4,2 x 13 mm	2 x 0,8 mm	max. 3,0 mm
4,2 x 16 mm	2 x 0,8 mm	max. 3,0 mm
4,2 x 19 mm	2 x 0,8 mm	max. 3,0 mm
4,8 x 16 mm	2 x 1,0 mm	max. 4,4 mm
4,8 x 19 mm	2 x 1,0 mm	max. 4,4 mm
4,8 x 25 mm	2 x 1,0 mm	max. 4,4 mm