
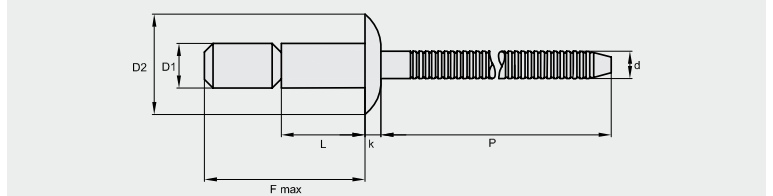


FLACHRUNDKOPF MIT GERILTEM NIETDORN DOMED HEAD WITH GROOVED MANDREL TÊTE PLATE CLOU CANNELÉ

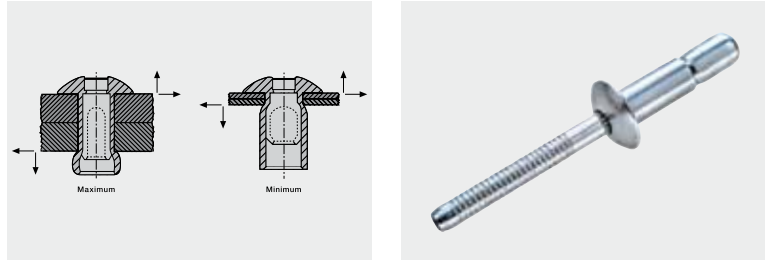

Aluminium AlMg 5 (5056 A)
Aluminium AlMg 5 (5056 A)
Aluminium AlMg 5 (5056 A)

Aluminium Legierung
Aluminium alloy
Aluminium alliage

Ø 4,8 mm

D1 = 4,8 +/- 0,09 mm

D2 = 10,0 + 0 / - 1,0 mm

k = 2,2 +/- 0,25 mm

d = 3,0 mm (Ref.)

P = ≥ 27,0 mm

L = +/- 0,99 mm

4,9 - 5,1 mm

	F max			CODE					
4,8 x 10,5 mm	20,0 mm	1,8 - 6,9 mm	76605 04810		2400 N	2000 N	222 N	250	2500
4,8 x 14,5 mm	27,0 mm	1,8 - 11,0 mm	76605 04814					250	2500

Ø 6,4 mm

D1 = 6,4 + 0 / - 0,11 mm

D2 = 13,5 + 0 / - 1,5 mm

k = 3,0 +/- 0,4 mm

d = 4,0 mm (Ref.)

P = ≥ 31,0 mm

L = +/- 0,99 mm

6,6 - 6,9 mm

	F max			CODE					
6,4 x 14,5 mm	27,0 mm	2,0 - 9,5 mm	76605 06414		5400 N	3600 N	445 N	250	2500
6,4 x 20,5 mm	37,0 mm	2,0 - 15,9 mm	76605 06420					250	2500

Ø 9,8 mm

D1 = 9,8 +/- 0,11 mm

D2 = 20,0 mm max

k = 4,5 mm max.

d = 5,8 mm (Ref.)

P = ≥ 31,0 mm

L = +/- 0,99 mm

10,0 - 10,4 mm

	F max			CODE					
9,8 x 21,3 mm	41,9 mm	3,1 - 14,2 mm	76605 09821		13100 N	8500 N	1100 N	100	1000

¹⁾ typische Werte typical values valeurs moyennes

Technische Änderungen vorbehalten Subject to technical modifications Sous réserve de modifications (techniques)