

## Linsenkopf-Bohrschrauben (SQ)


mit Innenvierkant

## Pan head self drilling screws (SQ)

with square socket in head

## Vis autoforeuse-tête cylindrique bombée (SQ)

empreinte carrée

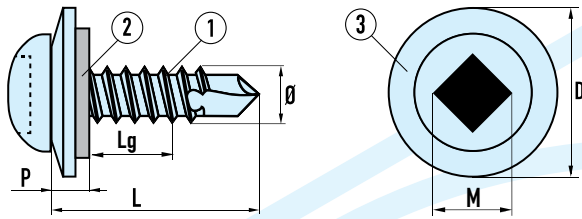

- ① C1 W.-Nr. 1.4006 AISI 410 **GOEBEL silber GL**  
C1 W.-Nr. 1.4006 AISI 410 **GOEBEL silver GL**  
C1 W.-Nr. 1.4006 AISI 410 **GOEBEL GL argenté**
- ② EPDM  
EPDM  
EPDM
- ③ A2 W.-Nr. 1.4301/03 AISI 305  
A2 W.-Nr. 1.4301/03 AISI 305  
A2 W.-Nr. 1.4301/03 AISI 305

Ø 4,2 mm

M = No. 2

P = 3,0 mm

D = 12,0 mm

= C

A2/A4	Stahl Steel Acier		Lg min			CODE
2 x 0,8 mm	max. 3,0 mm	4,2 x 13 mm	2,8 mm	2	500	41624 42 130
2 x 0,8 mm	max. 3,0 mm	4,2 x 16 mm	5,8 mm	2	500	41624 42 160
2 x 0,8 mm	max. 3,0 mm	4,2 x 19 mm	8,8 mm	2	500	41624 42 190

UPM / RPM / TR-MN = max. 1200

Ø 4,8 mm

M = No. 2

P = 3,0 mm

D = 12,0 mm

= C

A2/A4	Stahl Steel Acier		Lg min			CODE
2 x 1,0 mm	max. 4,4 mm	4,8 x 13 mm	2,2 mm	2	500	41624 48 130
2 x 1,0 mm	max. 4,4 mm	4,8 x 16 mm	4,3 mm	2	500	41624 48 160
2 x 1,0 mm	max. 4,4 mm	4,8 x 19 mm	7,2 mm	2	500	41624 48 190

UPM / RPM / TR-MN = max. 1200

